


LED Intelligent Driver

- Dimming interface: DALI, Push DIM.
- Dimming range from 0-100%, LED start at 0.1% possible.
- 0-100% flicker-free, achieve the level of exemption assessment.
- DALI dimming curve: liner curve or logarithmic curve.
- Over-heat / Over load / Short circuit protection, recover automatically.
- Class 2 power supply, full protective plastic housing.
- DALI bus standard: IEC62386-101,102, 207.
- Compliant with Safety Extra Low Voltage standard.
- Suitable for indoor I/II/III type lamps application.

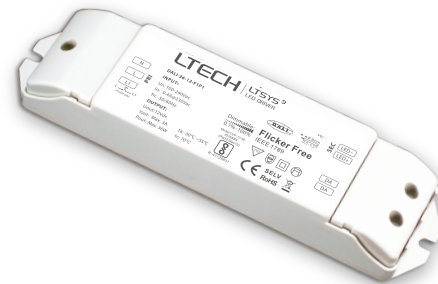

Flicker-free
IEEE 1789

Dimmable:
0.1%-100%




Specification

Model		DALI-36-12-F1P1	DALI-36-24-F1P1
OUTPUT	Output Voltage	12Vdc	24Vdc
	Output Voltage Range	12Vdc ± 0.5 Vdc	24Vdc ± 0.5 Vdc
	Output Current	Max. 3A	Max. 1.5A
	Output Power	Max. 36W	
	Output Power Range	0-36W	
	Strobe Level	Exemption assessment level.	
	Dimming Range	0-100%, dimming depth: Max. 0.1%	
	Overload Power Limitation	$\geq 102\%$	
	Ripple & Noise	≤ 200 mV	
	PWM Frequency	≤ 3600 Hz	
INPUT	Dimming Interface	DALI (IEC62386), Push DIM	
	Input Voltage	100-240Vac	
	Frequency	50/60Hz	
	Input Current	115Vac ≤ 0.8 A, 230Vac ≤ 0.4 A	
	Efficiency	$> 85\%$	$> 86\%$
	Inrush Current(typ.)	Cold start 20A at 230Vac	
	Anti Surge	L-N:1KV	
ENVIRONMENT	Leakage Current	< 0.5 mA/230Vac	
	Working Temperature	ta: -30°C ~ 55°C tc: 70°C	
	Working Humidity	20 ~ 95%RH, non-condensing	
	Storage Temp., Humidity	-40°C ~ 80°C, 10~95%RH	
	Temp. Coefficient	$\pm 0.03\%/^{\circ}\text{C}$ (0-50°C)	
PROTECTION	Vibration	10-500Hz, 2G 12min./1cycle, period for 72min. each along X, Y, Z axes.	
	Over-heat Protection	Shut down the output when PCB temp. $\geq 110^{\circ}\text{C}$, auto recovers.	
	Over Load Protection	Shut down the output when current load $\geq 102\%$, auto recovers.	
SAFETY & EMC	Short Circuit Protection	Shut down automatically if short circuit occurs, auto recovers.	
	Withstand Voltage	I/P-O/P: 3750Vac	
	Isolation Resistance	I/P-O/P: 100M Ω /500VDC/25°C/70%RH	
	Safety Standards	IEC/EN61347-1, IEC/EN61347-2-13	
OTHERS	Strobe Test Standard	IEEE 1789	
	Dimension	175x44x30mm(LxWxH)	
	Packing	178x48x33mm(LxWxH)	
	Weight(G.W.)	190g ± 10 g	


* The driver is suitable for connecting resistor current-limiting LED fixture (e.g. LED strip). The instantaneous surge current will be several times increased if connecting built-in constant current IC current-limiting LED fixtures. Then the driver will take the overloaded protection (hiccups flickering). When you order, please remark controlling the constant current LED fixture (e.g. underground light, LED wall washer, constant current LED strip, etc.), then we can prepare the special programs.

Dimensions

Unit: mm

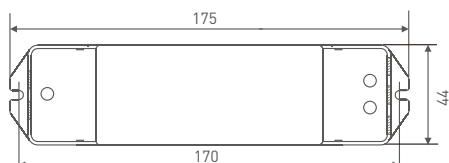

Wiring diagram

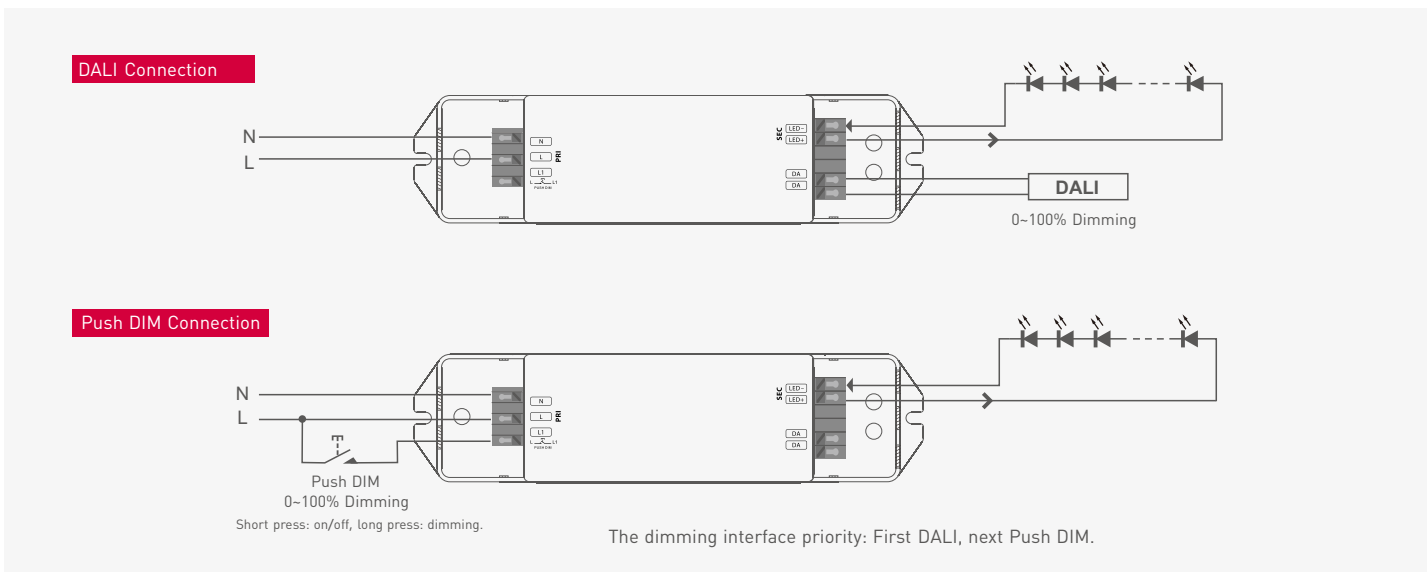

Push Dimming



Reset Switch

- On/off control: Short press.
- Stepless dimming: Long press.
- With every other long press, the light level goes to the opposite direction.
- Dimming memory: Brightness will be the same as previously adjusted when turning off and on again.

*No further notice if any changes in the manual.
Product function depends on the goods.
Please feel free to contact our official distributor if any question.